



**PINK PROVIDES:**  
1 Set of Curl Wall Metals  
1 Curl Wall Fabric  
Extra Pop Buttons

**YOU PROVIDE:**  
Site Plan/Event Layout  
Three Person Team  
Ladder  
Allen Key Set




Additional Support Please Call:  
212-253-6666 or  
After Hours: 646-853-3900

Metals are labeled for easy assembly. Simply match the corresponding parts, depress the button, and slide together.

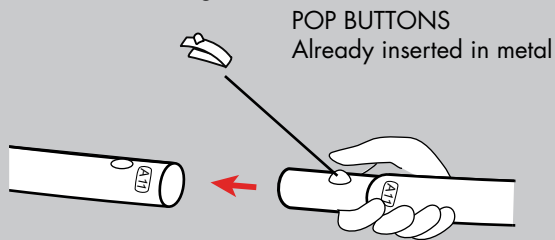


1. Join the six curved pieces that create the base of the wall.

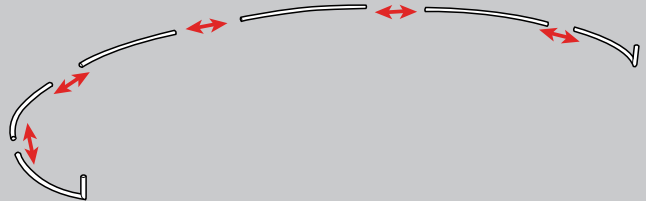


Prior to assembly, lay out drop cloth in designated work location. Before working with fabric, wash hands or put on gloves.

2. Join the seven curved pieces that create the top of the wall. The wall curves down at one end to meet the base.

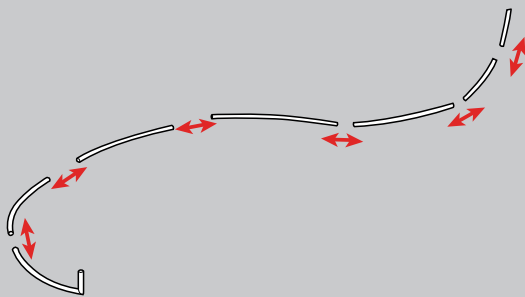


3. Connect the top and base pieces. Have one person hold the top piece while the other two connect the end supports.

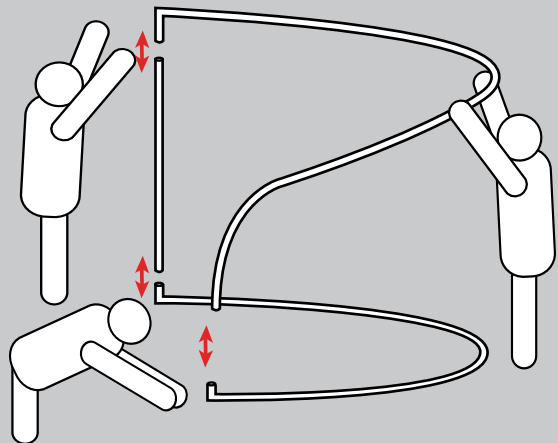


Any and all rights (including, without limitation, copyright, design patent, use patent and trademark) in and to all designs, concepts, renderings, or graphics (collectively, "Design") represented in this document were created by Moss Inc. and remain the sole and exclusive property of Moss Inc. Use of any such Design by the recipient without required purchase is strictly prohibited. ©2010


4. Have two people connect the middle supports to the wall frame using an allen key. The third person should still be supporting the middle part of the top piece. A ladder may be needed to reach the higher points.

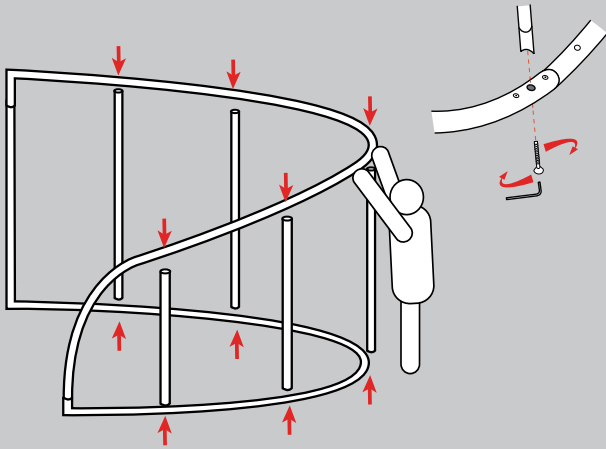


5. After assembling the metals, locate the fabric, spread it out and unzip it. The zipper runs from bottom to top along the vertical side of the Curl Wall. Where the zipper ends after unzipping is the bottom corner of that side.

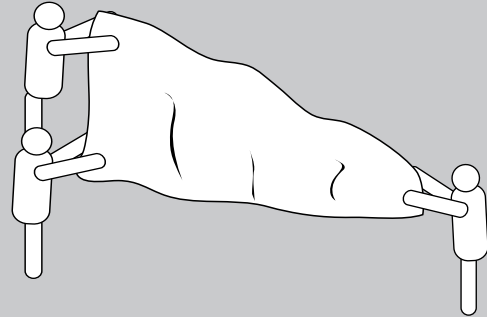

6. Begin sliding the fabric onto the shortest end of the frame. Remember that the person who has the zipper should run along the bottom edge. The last person should hold the fabric in a pile off the ground.

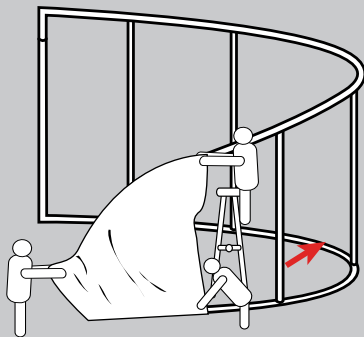


7. As the fabric is slid over the taller parts of the frame, a ladder may be necessary to continue sliding it along the top.

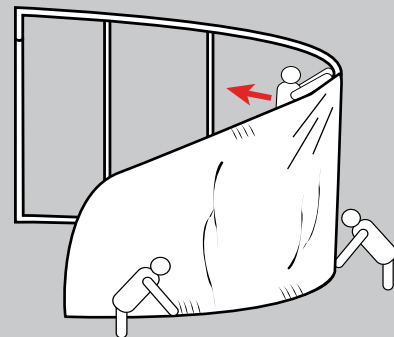


Any and all rights (including, without limitation, copyright, design patent, use patent and trademark) in and to all designs, concepts, renderings, or graphics (collectively, "Design") represented in this document were created by Moss Inc. and remain the sole and exclusive property of Moss Inc. Use of any such Design by the recipient without required purchase is strictly prohibited. ©2010

8. Have one person pull the fabric over the metal while another one zips. The fabric is strong, so we encourage pulling hard!

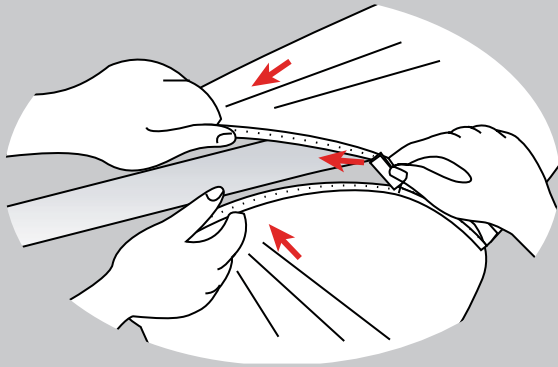

9. Zip up completely and straighten seams as needed. The Curl Wall is now complete.

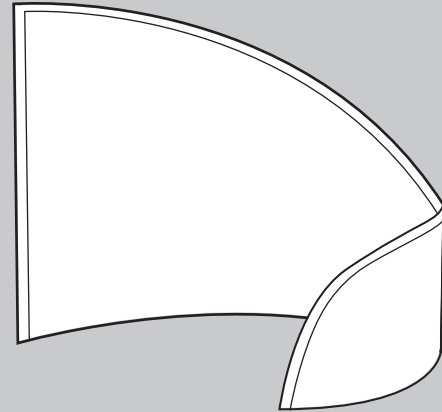

#### Final Note:

##### Metals:

After use, dismantle. Each metal is labeled; place back in the corresponding labeled bag. If possible, zip tie peices together.

Under NO circumstances should the metals be taped to one another.

##### Fabric:

Each fabric is labeled on the Pink Inc. tag and should be placed back in the corresponding labeled bag.

Any and all rights (including, without limitation, copyright, design patent, use patent and trademark) in and to all designs, concepts, renderings, or graphics (collectively, "Design") represented in this document were created by Moss Inc. and remain the sole and exclusive property of Moss Inc. Use of any such Design by the recipient without required purchase is strictly prohibited. ©2010